




# PROTEKT®

# AC 360

## Vertical fall arrest system

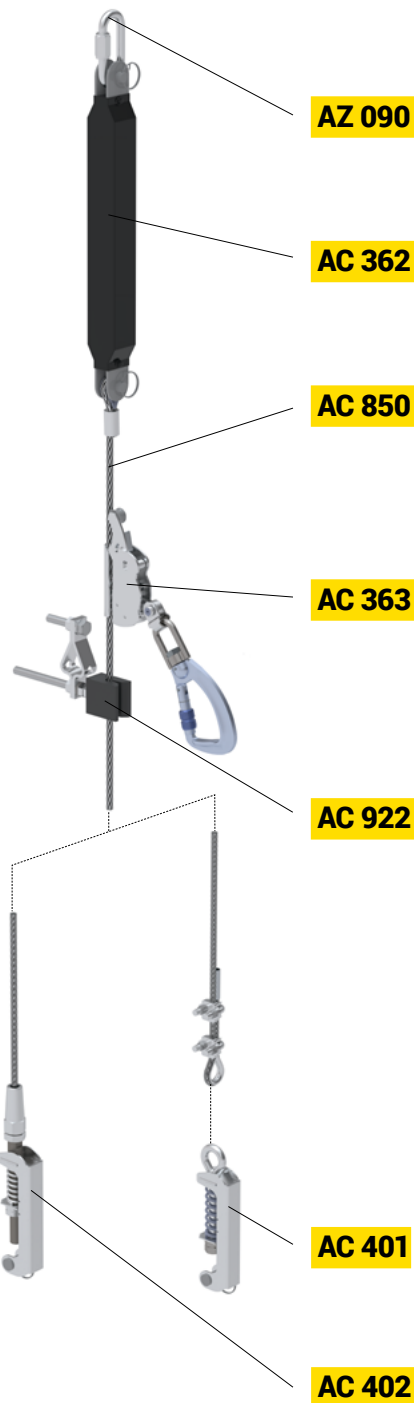

Compliance with the latest standard EN:353-1:2014



PROTECTION FOR  
**MAX. 2 PERSONS**



MAXIMUM WEIGHT  
OF SINGLE USER **140 KG**

The AC 360 have been modified according to the newest version EN 353-1:2014 standard. The system meets the requirements of European Parliament Regulation 2016/425.

The AC 360 system consists of a

- **vertical rope guide** made of 8 mm diameter stainless steel rope (ref. AC 850)
- The upper end of the rope guide is fitted with a **shock absorber** (ref. AC 362)
- The lower end of the rope guide is fitted with **spring tensioners** (ref. AC 401 or AC 402) with rope tension indicator
- Each installed guide is fitted with an **information plate** (ref. AC 803 / AC 804).
- The **slider** (ref. AC 363) is an individual user accessory. It is installed on the guide in case the protective system is needed. The slider slides up and down the rope during normal user movement and locks onto the rope to stop the user falling.
- The **rope guide** (ref. AC 922) that protects the rope from vibrations caused by wind for example. For system lengths of more than 10m.

The guide of the system can be inclined forwards and sideways by an angle not exceeding 15° from the vertical.

The system is designed for a maximum of 2 simultaneous users weighing up to 140 kg each.

Note: Full price list available on request

# PROTEKT®

OFFICE - Skromna 6, 93-405 Lodz, POLAND / CORRESPONDENCE ADDRESS - PROTEKT, Starorudzka 9, 93-403 Lodz, POLAND  
SALES DEPARTMENT Phone +48 42 29-29-500, export@protekt.com.pl, fax +48 42 680-20-93  
WAREHOUSE - Gombrowicza 6, 93-405 Lodz, POLAND

WWW.PROTEKT.PL


# AC 360 Vertical fall arrest system

## NEW SELF-LOCKING MECHANISM



### Protection against incorrect installation on the rope.

In case of improper installation, the locking mechanism will operate.

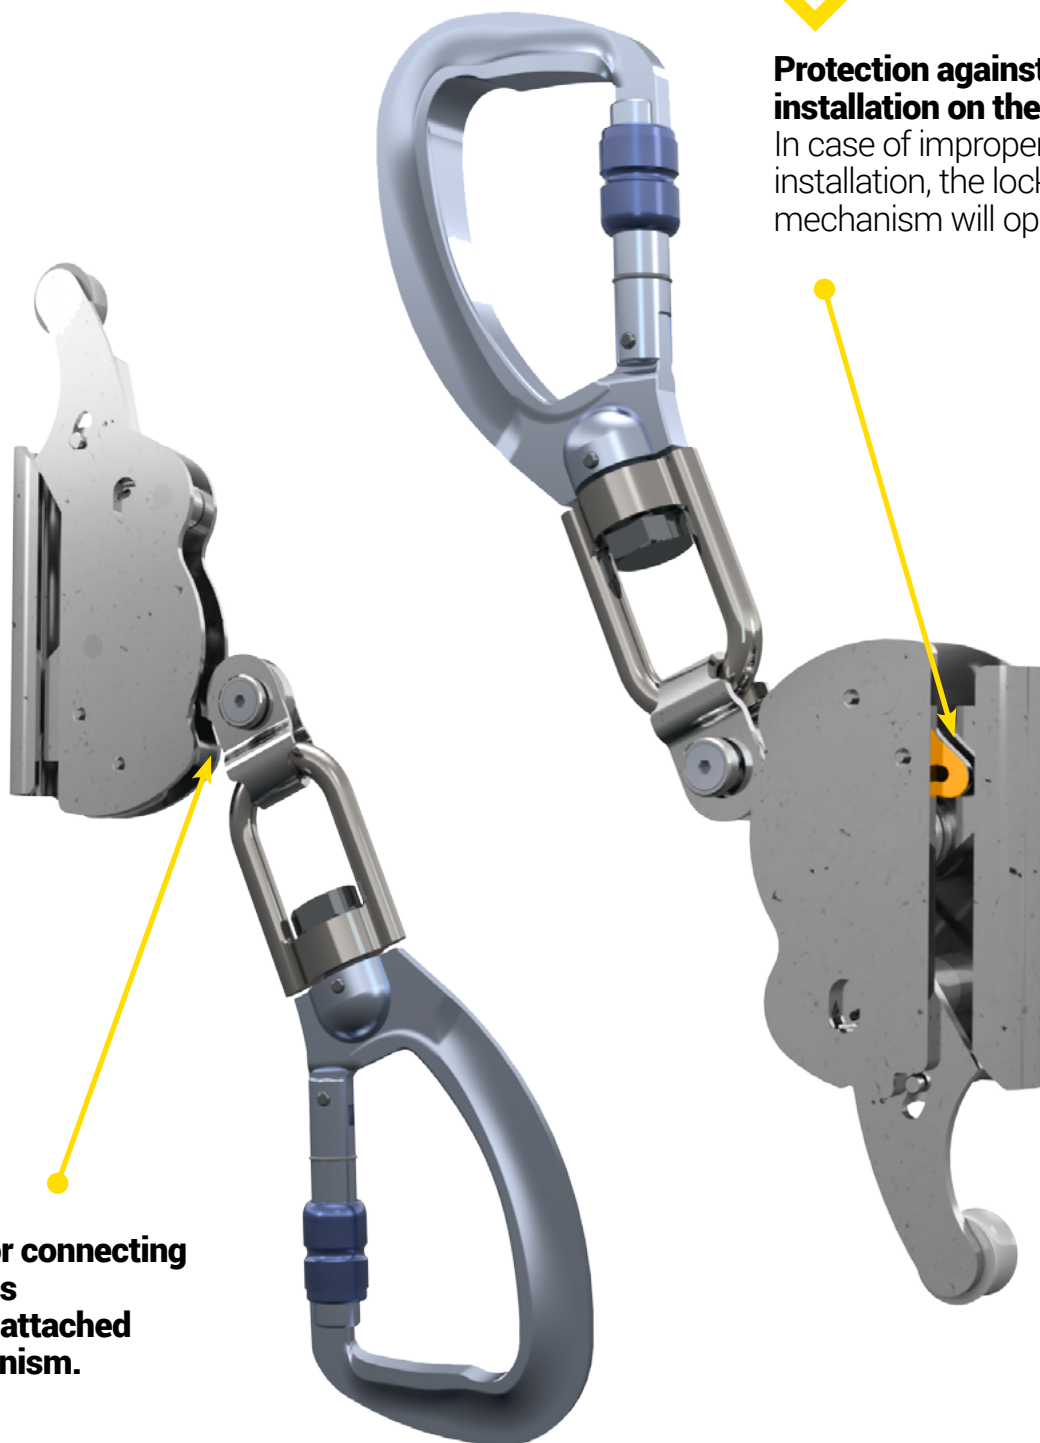

Snap hook for connecting to the harness permanently attached to the mechanism.

# AC 360 Vertical fall arrest system

## ASSEMBLY EXAMPLE

