

PROTEKT®

Speedcon snap hook
type AZ 028



WWW.PROTEKT.UK



SPEEDCON SNAP HOOK TYPE AZ 028

EN795:2012 TYPE B
EN362:2004

Ref. no.: AZ028



Snap hook AZ028 is provided with fall indicator. When arresting a fall the indicator becomes destroyed, thus the user is noticed to withdraw the device from use immediately. The fall indicator becomes deformed with forces above 2.5kN. It is made from aluminium and anodized in colour other than snap hook body to make it clearly visible. Once the indicator becomes deformed, extra clearance appears between the swivel and the body, and if the clearance exceeds 2mm the device may have been overloaded.

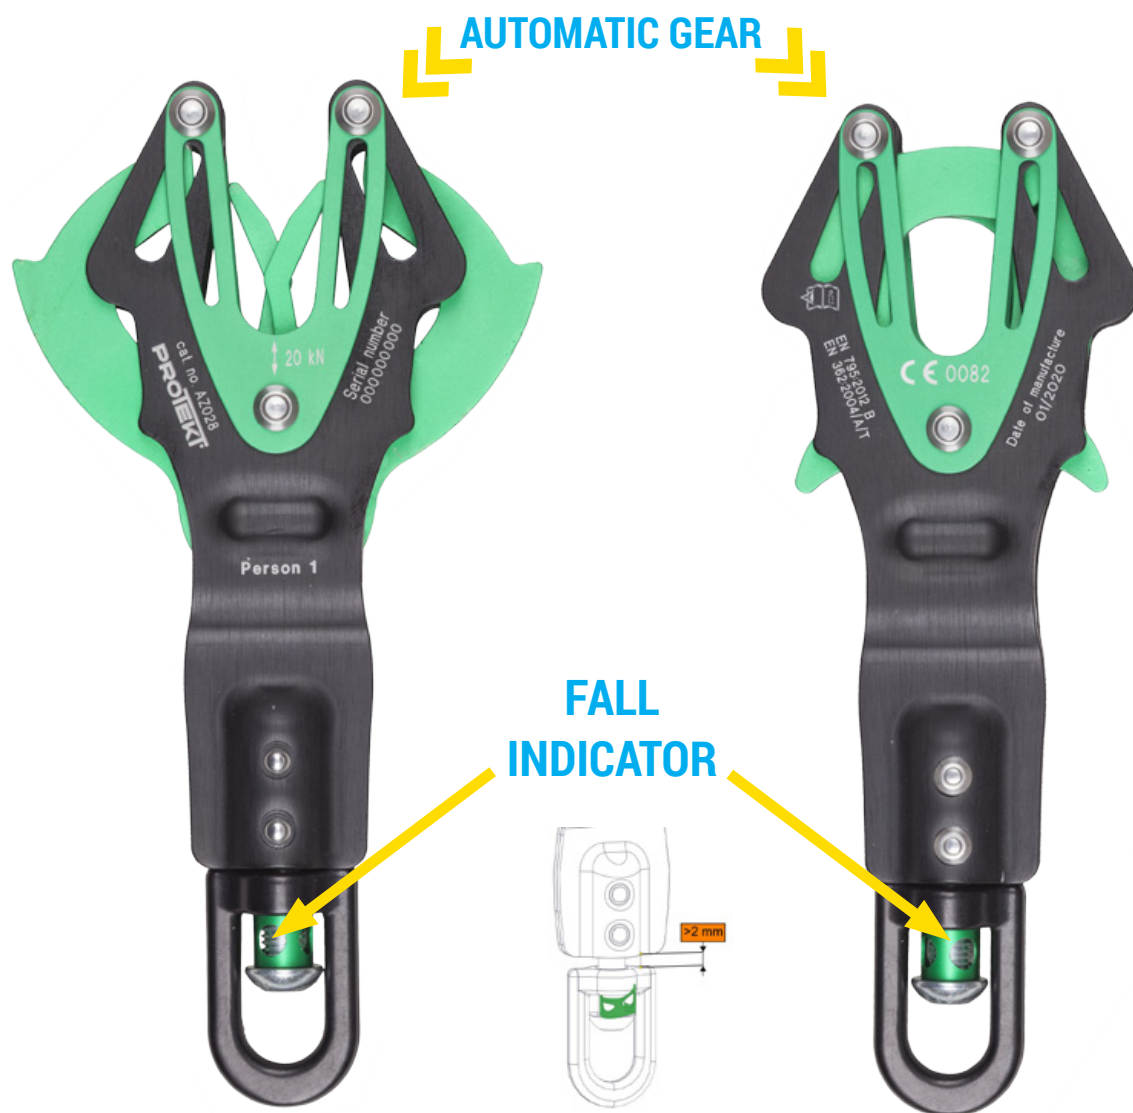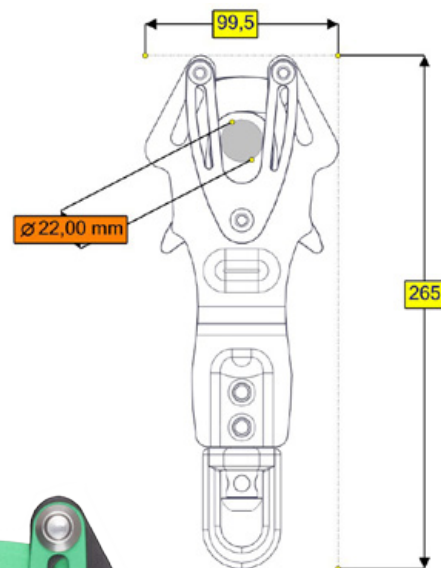

MATERIAL: aluminium


DIMENSIONS: 99,5 x 256 mm

STATIC STRENGTH: min. 20 kN

OPENING: 22 mm

INSTALLATION

Before snap hook is installed make sure to open it completely by pressing latches A and B simultaneously. Once pressed both latches will be opened and held in open position. If only one latch is pressed, it will be opened, and once released the latch will be closed instantly.

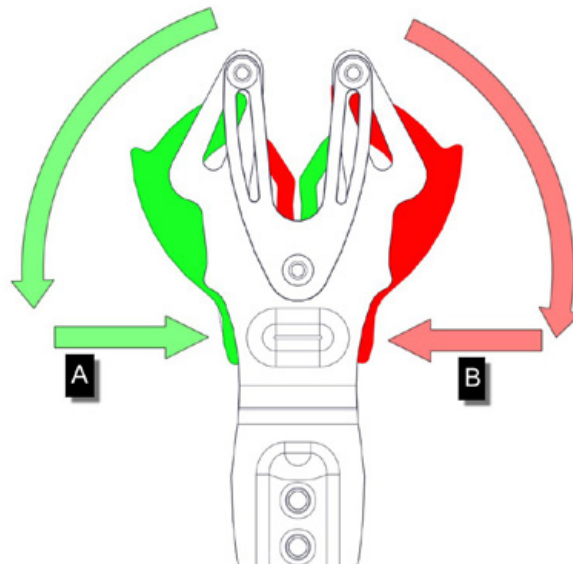

When snap hook is opened install it on an anchor point by sliding snap hook over the point and pushing it in slightly. Snap hook will close automatically. After closing check for proper fixation by pulling the snap hook.

WORKS WITH ANCHORAGE POINTS EN795:2012 TYPE A-D

